



1、产品概要 / Outline

可定制超大体积、超级大电流  
优异的直流偏置能力，可以处理瞬间极大峰值电流。  
扁平线绕组，极低的直流电阻。  
极强稳定性，电感值、直流偏置特性受温度等其他环境影响很小。  
磁屏蔽结构，抗电磁干扰能力强。  
工作温度：-55℃ ~ +155℃ (包含线圈发热)。  
应用于数字功放、电源模块、工业控制、充电桩、通讯基站等其他 24 小时工作设备。

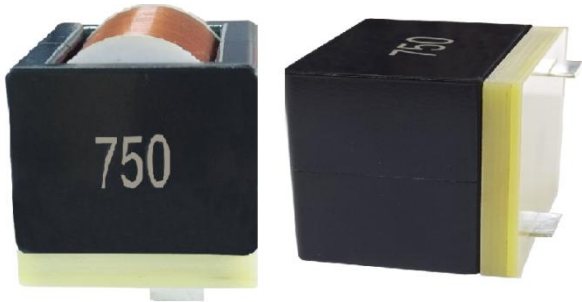

2、外观尺寸/ Appearance size    单位:mm

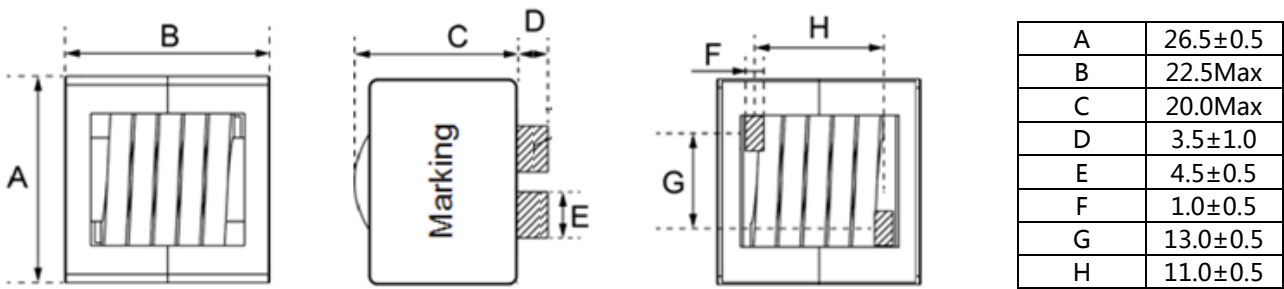

3、电气特性/Electrical characteristics


| 型号/NO        | L/uH | DCR ( mΩ ) |      | Irms(A) | Isat(A) |
|--------------|------|------------|------|---------|---------|
|              |      | Typ        | Max  |         |         |
| DEQ2017-3R3M | 3.3  | 0.77       | 0.92 | 70.0    | 52.2    |
| DEQ2017-4R7M | 4.7  | 1.13       | 1.35 | 55      | 41.8    |
| DEQ2017-7R8M | 7.8  | 1.7        | 2.05 | 47      | 35      |
| DEQ2017-100M | 10   | 2.1        | 2.5  | 41      | 32      |
| DEQ2017-150M | 15   | 3.51       | 4.30 | 31.5    | 24.0    |
| DEQ2017-220M | 22   | 4.66       | 5.55 | 24      | 21      |

注释


- ◆ K 表示电感值的公差为±10%，M 表示电感值的公差为±20%
- ◆ K said inductance tolerance is ±10%, M said inductance tolerance is ± 20%
- ◆ 所有数据基于环境温度 25℃条件下测试
- ◆ All data is based on testing at an ambient temperature of 25 °C
- ◆ 测试条件：100KHz/1.0V
- ◆ 本页面未能录入全部或最新的数据，请您在订购前向本公司咨询精准参数及样品。
- ◆ We were unable to input all or the latest data on this page. Please consult our company for accurate parameters and samples before placing an order.

4 包装规格/ Packaging specifications

1. PET plate specification: xxx\*xxx\*xxmm,xpcs/PET Box

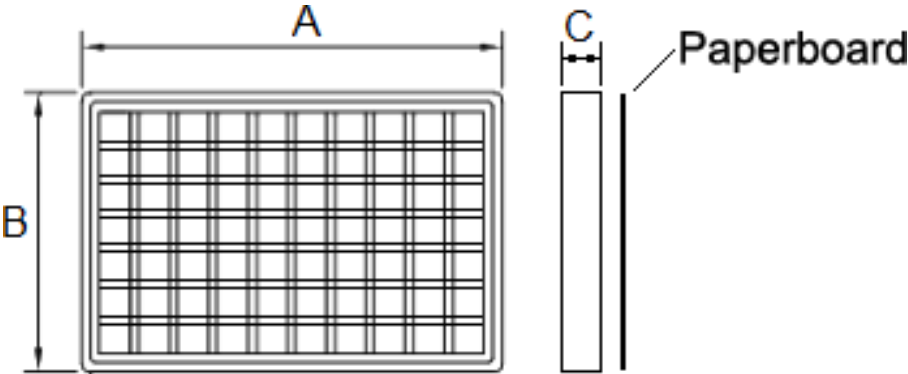

2、Outer box specification: xxx\*xxx\*xxxmm,x PET plate in one box

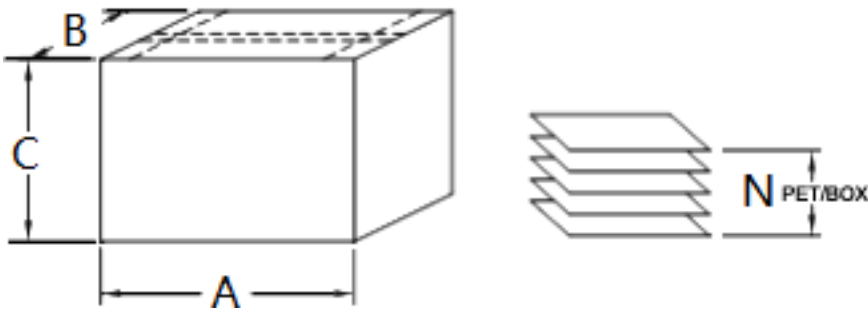

| Plastic Plate(mm) | Outer Box(mm) |
|-------------------|---------------|
| xpcs/PET Box      | xxpcs/Box     |

6、其他

- ◆ 本产品为无铅，请采用无铅环境作业
- ◆ Other: Our company's products are lead-free, please operate in a lead-free environment
- ◆ 由于页面限制，更多资料请联系我司
- ◆ Due to page limitations, please contact our company for more information
- ◆ 在过载电流等不正常条件下，本电感产品无自我保护功能。
- ◆ Under abnormal conditions such as overload current, this inductor product has no self-protection function.
- ◆ 产品储存期不建议超过 12 个月
- ◆ The storage period of the product is not recommended to exceed 12 months

电感使用注意事项  
Precautions for using inductors

1、环境条件：电感的使用环境对其性能有重要影响。潮湿与干燥、环境温度的高低、高频或低频环境等都需要特别注意。

Environmental conditions: The usage environment of inductors has a significant impact on their performance. Special attention should be paid to factors such as humidity and dryness, high or low ambient temperatures, and high or low frequency environments

2、**特殊环境**尽可能选择安瑞科的一体成型电感，此类电感合金粉压铸，全密封结构。防潮、防腐蚀、耐高温较强

For special environments, it is recommended to choose Anruike's integrated inductors, which are made of alloy powder and have a fully sealed structure. Strong moisture resistance, corrosion resistance, and high temperature resistance

3、**频率特性**：在高频时，电感的阻抗特性会变得明显，可能会出现耗能发热、感性效应降低等现象。铁氧体材料在高频下会表现出较高的阻抗。

Frequency characteristics: At high frequencies, the impedance characteristics of inductors become apparent, and phenomena such as energy dissipation, heat generation, and reduced inductive effects may occur. Ferrite materials exhibit high impedance at high frequencies.

4、**电流和发热**：电感设计时要考虑其能承受的最大电流及其相应的发热情况。过载使用会导致电感失效。

Current and heat generation: When designing an inductor, the maximum current it can withstand and its corresponding heat generation situation should be considered. Overloading can cause the inductor to fail.

5、**保存条件**：电感在保存和使用时也需要注意环境条件。最佳安装保质期限为 6 个月，保存条件为密封包装、温度 $\leq 40^{\circ}\text{C}$ 、相对湿度 $\leq 70\%$ 。避免将产品保存在高温、高湿、有尘埃、腐蚀性气体的环境中。

Storage conditions: Inductors also need to pay attention to environmental conditions during storage and use. The optimal installation shelf life is 6 months, and the storage conditions are sealed packaging, temperature  $\leq 40^{\circ}\text{C}$ , and relative humidity  $\leq 70\%$ . Avoid storing the product in environments with high temperature, high humidity, dust, and corrosive gases.

6、**避免过载和不正常条件**：电感没有自我保护功能，不能在过载、高温、高压等不正常条件下使用。超规格的高电压绝缘测试会对产品造成损伤，缩短使用寿命。

Avoid overload and abnormal conditions: Inductors do not have self-protection functions and cannot be used under abnormal conditions such as overload, high temperature, and high voltage. Excessive high voltage insulation testing can cause damage to the product and shorten its service life.

7、**导线裸露式电感（非屏蔽）**应避免二次以上 SMT 作业，双面板应先焊接载有电感的板面。

Bare wire inductors (unshielded) should avoid secondary SMT operations, and double-sided boards should be soldered with the surface carrying the inductor first.